







Green

Greener

Low VO

Recycled

Water Conserving

Energy Efficient

Low VOC

Green Attributes

- Recycled Content
- Recyclable
- Repairable
- Rapidly Renewable
- Salvaged/Reclaimed
- Locally extracted
- Chain of Custody
- Child Welfare

Green Attributes

- Water Efficiency
 - Plumbing Leaks
 - Fixture Efficiency
 - MaP Toilet Test
- Energy Efficiency
 - Energy Audit
 - ENERGY STAR





Green Attributes

- Low Emitting
 - CARB
 - NAUF
 - Formaldehyde Free
 - certified low emitting
 - Kitchen Cabinet Manufacturers Association EPS












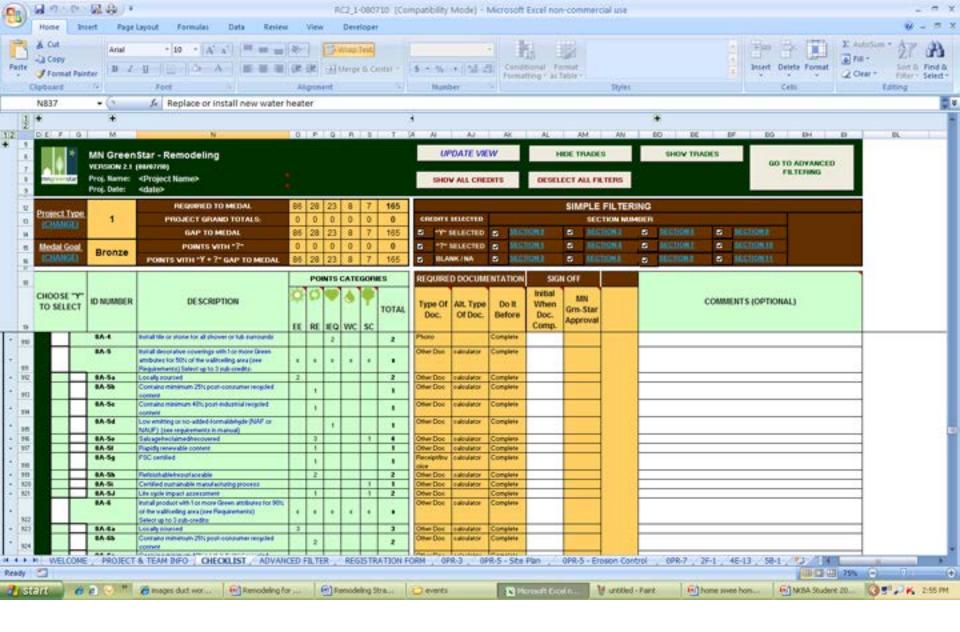

www.mngreenstar.org Section 8 Remodeling Manual and Checklist – Finish Materials







SIMPLE: Old-World Feel Without the clutter of turned legs and scrolled pilasters


FSC Certified Mahogany





Simple: Spa-Like Experience

NAUF cabinetry: No Added Urea Formaldehyde

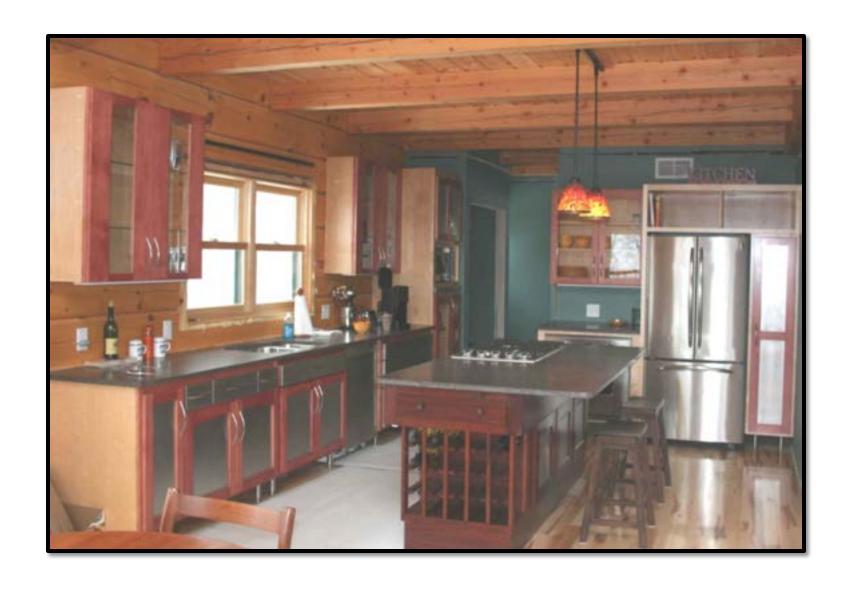

Salvaged/Reclaimed Kitchen and flooring





Organized: Cabinet Storage Solutions







Organized: CARB Compliant



RESOURCES

Program

Workshops / Meetings

Presentation is available.

The ATCM to control formaldehyde emissions from composite wood products was approved on April 18, 2008, by the Office of

wood products including hardwood plywood, particleboard, medium density fiberboard, thin medium density fiberboard /thickness

s 8mm), and also furniture and other finished products made with composite wood products. The ARB's April 26, 2007 Board

Organized: Kitchen Composting












O R G A N C






Recycled resin, natural elements between layers

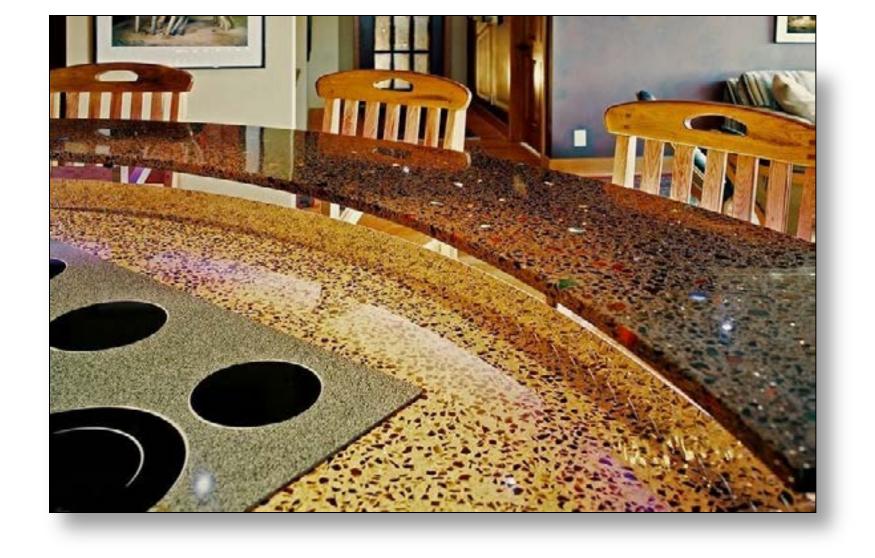


ENERGY STAR LED Lighting



MaP Maximum Performance Score for Toilet Efficiency and Performance www.map-testing.com

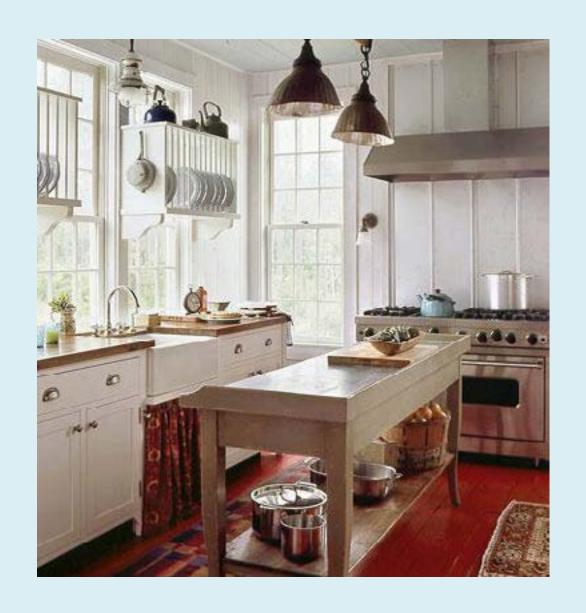

BEACH COTTAGE

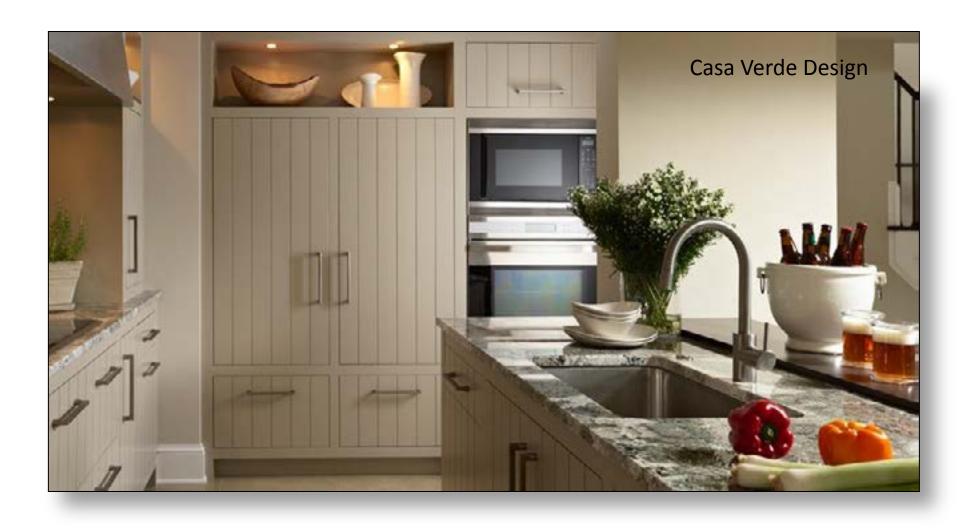

Test Home for Plumbing Leaks





WaterSense Faucets and Showerheads











CERTIFIED

Window Co.

Millennium 2000+ Casement

Vinyl-Clad Wood Frame Double Glaze • Argon Fill • Low E

ENERGY Performance

- Energy savings will depend on your specific climate, house and lifestyle
- For more information, call [manufacturer's phone number] or visit NFRC's web site at www.nfrc.org



Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product energy performance. NFRC ratings are determined for a fixed set of environmental conditions and specific product sizes.











N A V B Ε








Non-PVC, breathable wall coverings



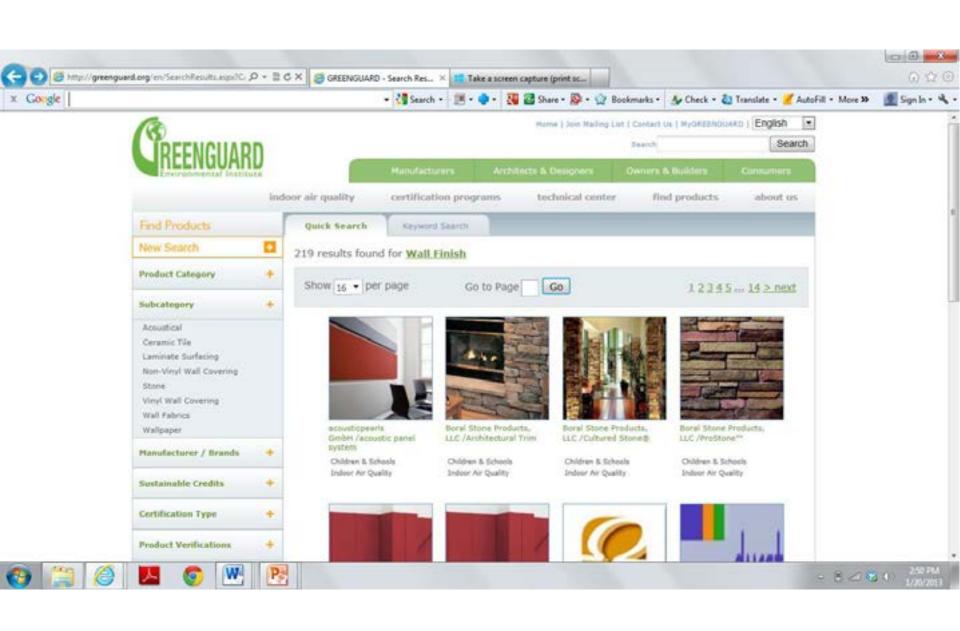

A colorful palette full of possibilities.





SOUND CHECK


Clear propertied pile with energetic trus of cylor reads in a tight strips design. Ledds beed with significal initialized in a propert style (quarter-turn). ISONs recycled Bytes face fibres, Shade in the USA.

\$10.00 per tile

photos make. This style flushess is unabout strain pattern dissipant to vary from source to report, as strain will such photostyle stigs. Each still contents on the strain in photostyle for





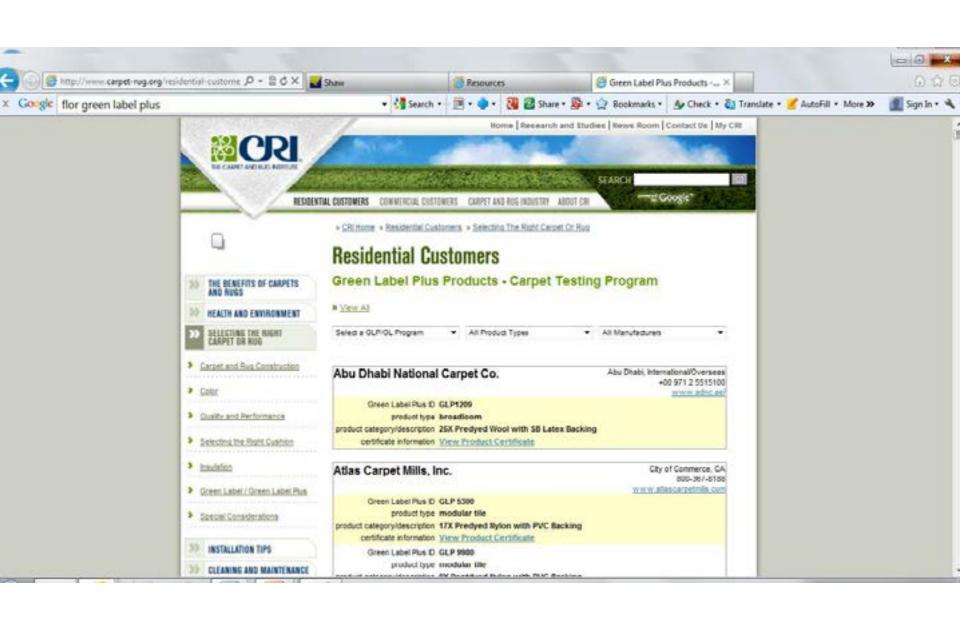




Kitchen Cabinet Manufacturers Association (KCMA): Environmental Stewardship Program (ESP)

"80% of <u>particleboard & medium density fiberboard</u> used in cabinets must contain 100% recycled or recovered fiber content" (criteria to obtain optional points in program)



Н O N E S U C K E

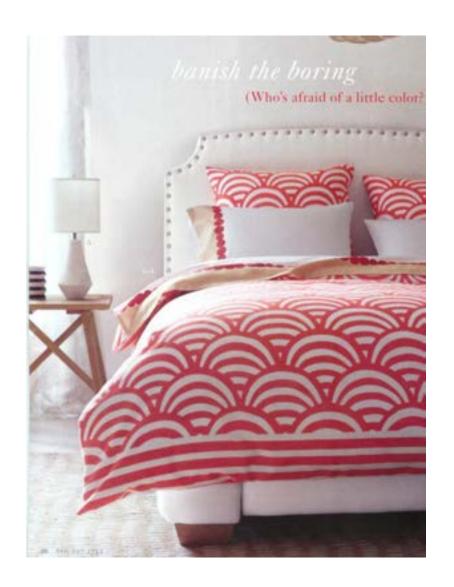





Recyclable:

Must have Collection stream In place



Child Welfare



Now known as GoodWeave International



THE BALLARD FABRIC LIB

our fabrics on our upholstery frames to create your own Special Order item. Details on page 16.



















800-367-2775 ballarddesigns.com






























































Third-Party Certified Attributes

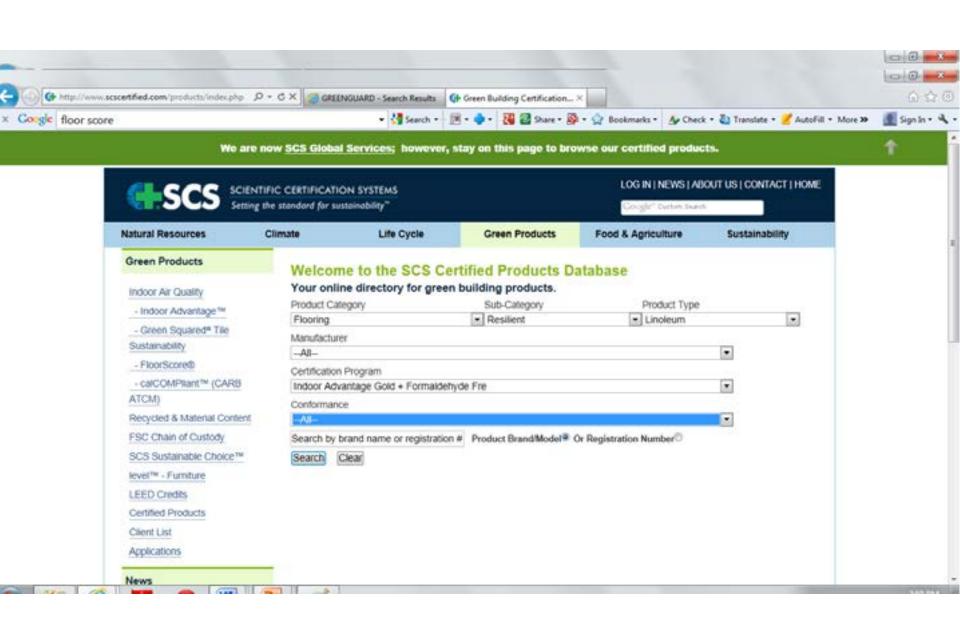



Rapidly Renewable

Handmade cement tile

If a Lagoon's handmade encaustic cement tiles show surface imperfections, chipped edges, and color variations, and they're softer than either ceramic or possessin tiles fired in a kiln. In company owner Lundy Wilder's view, that holps to make them unique works of art that can't be matched by factory-made ceramic tiles.

The tiles have a color layer—made from ground marble dust, pertland consent, and earth pigments—which is bonded to a coment-and-sand substrate using pressure. Tiles are available in stock and custom patterns (VillaLagoonTile.com). Thicknesses range from % in, to about % in,, sizes are from 4 in, to 12 in, and pricing is between \$12 and \$20 per sq. ft. They weigh about twice as much as standard porcalain tiles (one 8-in, tile

weight about 3 fb.), and the manufacturer recommends that they be sealed after installation. When properly installed and sealed, tiles are frostproof, the company says.

Scott Gibson





FINE HOMEBUILDING

Planta bottom left Dan Thumbon


E X R






Formaldehyde Free

Certified Low Emitting (Soy-Based Stain, Cleaner Sealer)

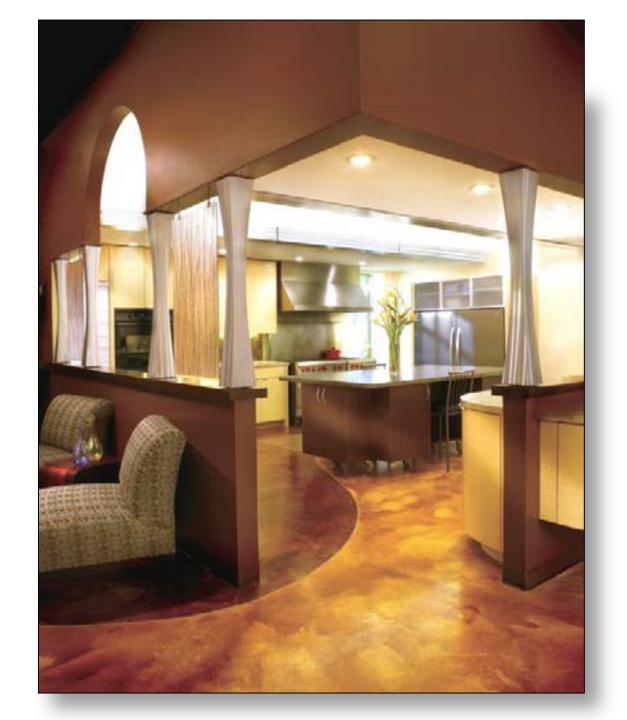

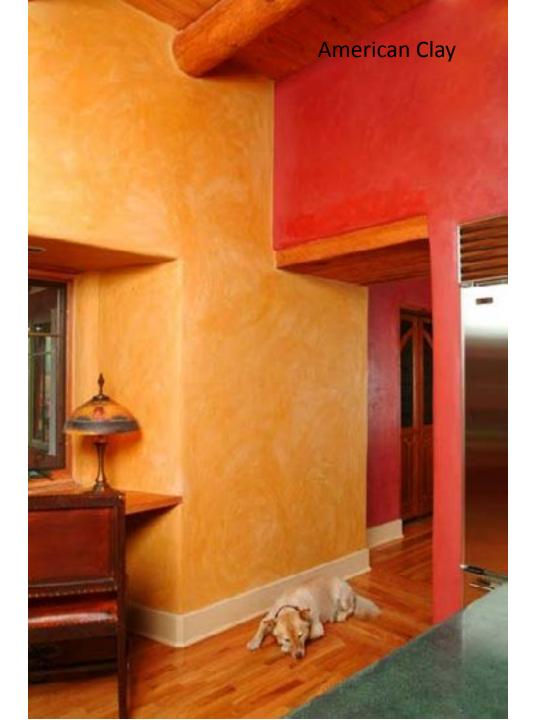

Repairable
On Site



CEILINGS







Standards for VOC Content Paint, Finishes, Stains



Salvaged

Beautiful

More Than Beautiful

Low Voc

Recycled

Water Conserving

Energy Efficient

Low VOC



New Website

www.morebeautifulhome.com

Cindy Ojczyk ("o-check")



cindy@simplygreendesign.com